

**A mined ore, Pyrolox® effectively reduces iron, sulfur and manganese from problem water.**

# Pyrolox®

A naturally mined ore, Pyrolox® is a mineral form of manganese dioxide which has been used in water treatment for more than 75 years. Pyrolox is a granular filtration media for hydrogen sulfide, iron and manganese reduction. Pyrolox functions as a catalyst, but itself remains relatively unchanged.

Pyrolox works on a principle whereby the hydrogen sulfide, iron and manganese are oxidized and trapped on the media while simple backwashing cleans the bed. No chemical regeneration is required, nothing is imparted into the drinking water and Pyrolox has a high capacity for low contaminant concentrations.

Pyrolox can be used in conjunction with aeration, chlorination, ozone or other pretreatment methods for difficult applications. Chlorine or other oxidants accelerate the catalytic reaction.

**Because of its heavy weight, it is very important that Pyrolox filters are backwashed properly to insure adequate bed expansion and continued service life.**

## ADVANTAGES

- Effective reduction of iron, sulfur and manganese
- Durable material with long service life and low annual attrition of bed
- No chemical regeneration required, only periodic backwashing



## PHYSICAL PROPERTIES

- Color: black
- Bulk Density: 125 lbs./cu. ft.
- Mesh Size: 8 x 20
- Effective Size: 0.51 mm
- Uniformity Coefficient: 1.7
- Specific Gravity: 3.8

## CONDITIONS FOR OPERATION

- pH: 6.5-9.0
- Bed depth: application dependent
- Backwash flow rate: 25-30 gpm per sq. ft.
- Backwash expansion: 15-30% of bed depth
- Service flow rate: 5 gpm/ sq. ft.
- Freeboard: 40% of bed depth (min.)



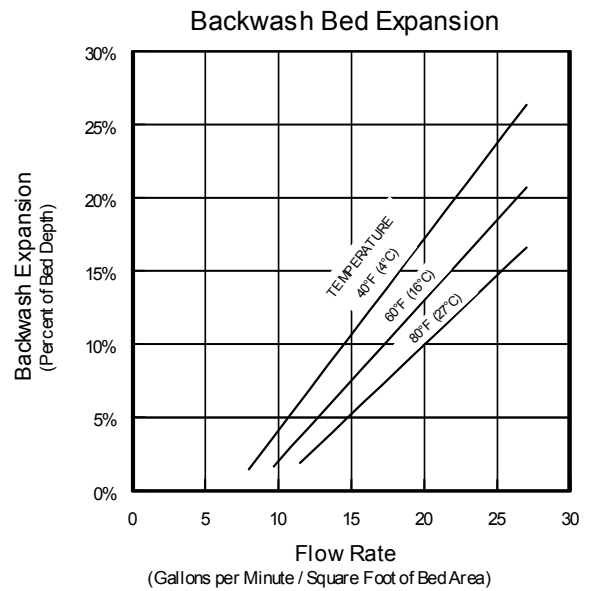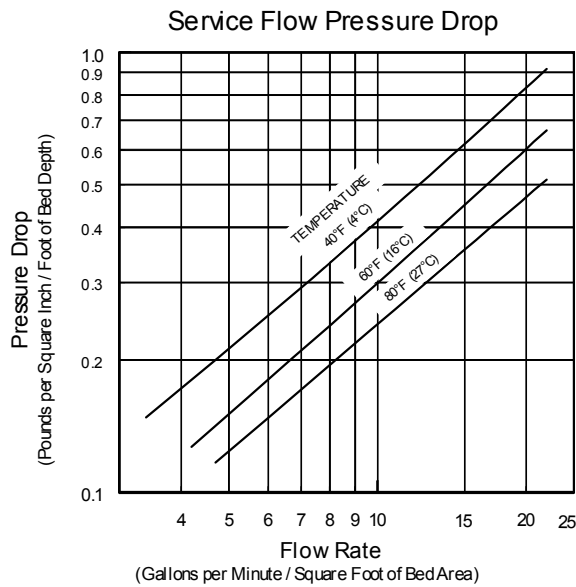

## ORDER INFORMATION

Part No.	Description	Cu. Ft./Bag	Wt./Cu. Ft.*	Bags/Pallet	Weight/Pallet	Pallet Dimensions
A8004	Pyrolox®	0.4 (50 lbs.)	125 lbs.	40	2050 lbs.	48" x 40" x 21"

\*Weight per cubic foot is approximate.



Form No. 2356  
Updated 02/05

Pyrolox® is a trademark of American Materials.

The information and recommendations in this publication are based on data we believe to be reliable. They are offered in good faith, but do not imply any warranty or performance guarantee, as conditions and methods of use of our products are beyond our control. As such, Clack makes no express or implied warranties of any kind with respect to this product, including but not limited to any implied warranty of merchantability or fitness for a particular purpose. We recommend that the user determine whether the products and the information given are appropriate, and the suitability and performance of our products are appropriate, by testing with its own equipment. Specifications are subject to change without notice.

The information and recommendations given in this publication should not be understood as recommending the use of our products in violation of any patent or as a license to use any patents of the Clack Corporation.

The filter medias listed in this brochure do not remove or kill bacteria. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Clack will not be liable under any circumstance for consequential or incidental damages, including but not limited to, lost profits resulting from the use of our products.